

Cat[®] Extreme Application Grease

For grease fittings and lubrication points in high-load
and high speeds conditions

NLGI Grade 1, 2



Discover the Difference

Cat[®] Extreme Application Grease is developed, tested, and approved by Caterpillar to meet same high standards as all Genuine Cat Parts.

Long Life—High-quality calcium sulfonate complex formula with 5% molybdenum disulfide (moly) for long service life in Cat applications.

Moisture Resistance—Resists washout from fresh and salt water.


Reduced Component Wear—Resists softening and continues to protect parts under extreme loads and high speeds.

Corrosion Protection—Resists oxidation and protects metal against rust. Will not corrode or damage steel, copper bearing alloys or conventional seal materials.



Cat® Extreme Application Grease

Grease Selection Guide

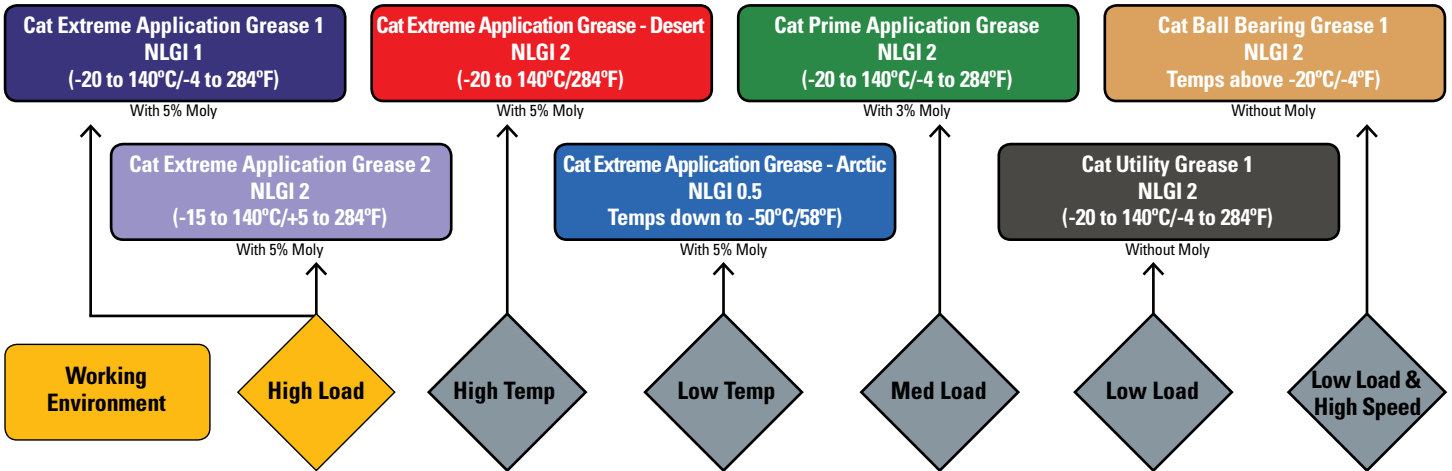

* All temperatures are Operating Temperatures

Typical Properties		
NLGI	1	2
Color	Grey Black	
Molybdenum Disulfide, %	5	5
Operating Temperature Range, °C	-20 to +140	-15 to +140
Operating Temperature Range, °F	-5 to +285	+5 to 285
Base Oil Type	Mineral	
ASTM D445 Base Oil Viscosity 40°C, mm ² /s	150	
Thickener Type	Calcium Sulfonate	
ASTM D2265 Dropping point, °C	> 260	> 260
ASTM D217 Penetration, worked 60, mm/10	325	280
ASTM D2596 4 Ball weld load, kg	620	620
ASTM D1743 Rust prevention, distilled water	Pass	Pass
ASTM D1263 Water wash-out, 175°F, mass %	3	3

The values shown are typical values and should not be used as quality control parameters to either accept or reject product. Specifications are subject to change without notice.

Recommended Use

Cat Extreme Application Greases are formulated for grease fittings and lubrication points in high-load and high-speed applications with operating temperatures ranging from -20°C to +140°C (-4°C to +284°F) for NLGI 1 and -15°C to 140°C (+5°F to +284°F) for NLGI 2.

Health and Safety

For information on proper use for health, safety and environment, please refer to the Material Safety Data Sheet (MSDS). Read and understand the MSDS before using this product. Always observe good hygiene measures. For a copy of the MSDS, contact us or visit the web at www.catmsds.com.

CAT DEALERS DEFINE WORLD-CLASS PRODUCT SUPPORT.

We offer you the right parts and service solutions, when and where you need them.

The Cat Dealer network of highly trained experts keeps your fleet up and running to maximize your equipment investment.

BUILT FOR IT.™



PEHJ0403
www.cat.com

© 2014 Caterpillar • All Rights Reserved • Printed in USA
CAT, CATERPILLAR, BUILT FOR IT, their respective logos, "Caterpillar Yellow", the "Power Edge" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

